


CROSSWALK WIDTHS & CONFIGURATION VARY; MUST CONFORM TO FDOT INDEX NO. 304.

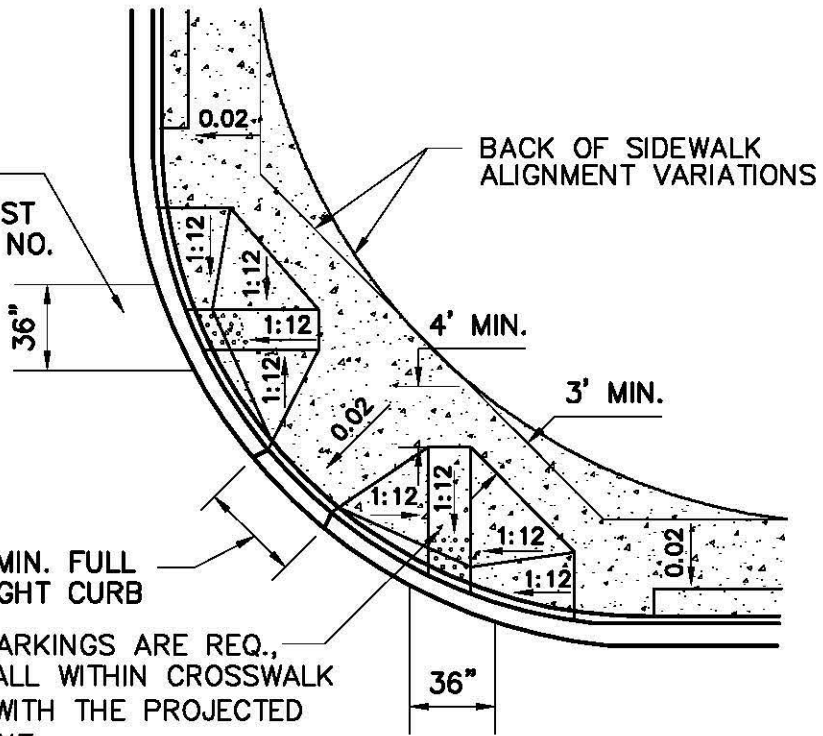

WHEN CROSSWALK MARKINGS ARE REQ., RAMP RUNS MUST FALL WITHIN CROSSWALK LIMITS & PARALLEL WITH THE PROJECTED CROSSWALK ALIGNMENT

PUBLIC SIDEWALK CURB RAMPS
TYPICAL PLACEMENT OF PUBLIC SIDEWALK
CURB RAMPS AT CURBED RETURNS
 N.T.S.

F:\work\ALL\CAD-DWG\STANDARDS\CMB_STANDARD_DETAILS\Public Works Manual\CMB Roadway Details

APPROVED

10/1994

REVISED

05/27/2004

12/2006

TITLE:

ROADWAY DETAILS NO.1
PUBLIC SIDEWALK CURB RAMPS
TYPICAL PLACEMENT OF PUBLIC SIDEWALK
CURB RAMPS AT CURBED RETURNS

RS12

SHEET 12 OF 30