

INTERLOCKING PAVERS COLOR & TEXTURE APPROVED BY C.M.B. PLANNING & ZONING, & PUBLIC WORKS (SEE SPECIFICATIONS)

1/2" BEVEL @ 45°

12" (TYP.)


VARIES

1 1/2"

8"x12" CONCRETE HEADER CURB

2 #5 STEEL REINFORCING RODS 54" CONTINUOUS FOR BREAK AWAY

FINISH GRADE

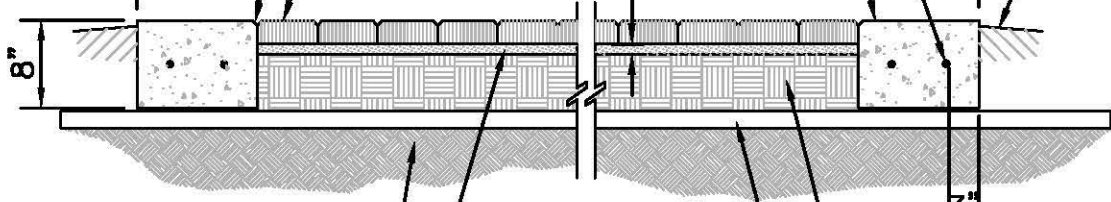

CLEAR (TYP.)

8" LIME ROCK BASE

IRRIGATION SLEEVE, EXTEND 12" BEYOND EDGE OF CURB

12" STABILIZED SUBGRADE

1 1/2" MIN. SAND LEVELING COURSE (SEE CMBPWM SPECIFICATIONS)

NOTE:
ALL WORK MUST COMPLY WITH THE CITY OF MIAMI BEACH PUBLIC WORKS MANUAL SPECIFICATIONS, PART II, SECTION 9 ROADWAYS.

TYPICAL PAVER WALKWAY IN AREAS OUT OF ROADWAY
N.T.S.