


**TYPICAL PAVEMENT RESTORATION OVER UTILITY LINE**  
N.T.S.

**NOTES:**

1. THIS DETAIL APPLIES TO ANY UTILITY PIPE WHERE THE COVER IS LESS THAN 30", AND APPROVED BY CITY ENGINEER.
2. REINFORCEMENT TO BE #5  
 ● 8" O.C.E.W.
3. CONCRETE TO BE 5000 PSI WITH HIGH STRENGTH PLASTICIZER

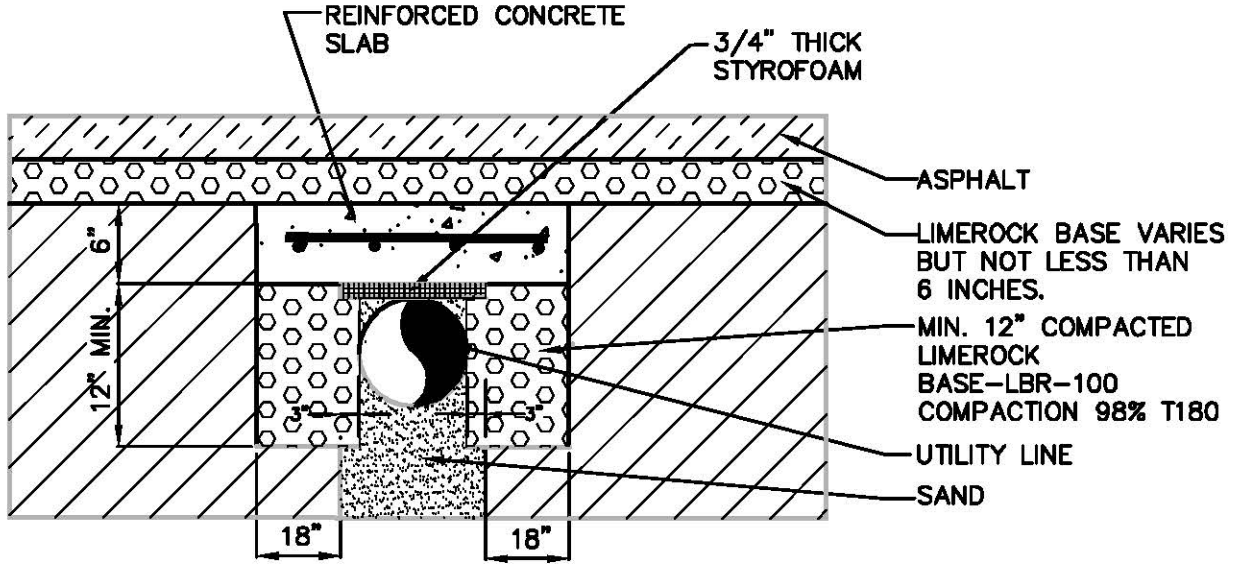

**SECTION A-A**  
N.T.S.

**REINFORCED CONCRETE SLAB**  
**(FOR GROUND COVER LESS THAN 30")**  
 N.T.S.